



NO ENERGY
WASTE



Yichun Dawnice Manufacture and Trade Co., Ltd.
Focus On High Quality Residential & Commercial ESS



Dawnice energy
Yichun Dawnice Manufacture and Trade Co., Ltd.
info@dawnice.com <https://www.energydawnice.com>

Address: Building 1, Xiongxing Technology Industrial Park,
No. 111 Yishang Avenue, Yichun Economic Development Zone,
Yuanzhou District, Yichun City, Jiangxi Province, China



TO BE THE WORLD WIDEST ENERGY STORAGE SERVICE PROVIDER

COMPANY PROFILE

Yichun Dawnice Manufacture and Trade Co., Ltd., founded in 2021, is a leading global provider of energy storage solutions. Headquartered in Yichun, Jiangxi, the "Lithium Capital of Asia", the company leverages the comprehensive local industrial chain and upstream resource synergy advantages to bring together an R&D and manufacturing team with 15 years of experience in the lithium battery field. The team has built an energy storage product system covering C&I, residential and diversified scenarios, providing customers with comprehensive energy storage solutions.

Amid the global energy transition, Dawnice has established more than 30 local service centers across over 150 countries and regions, serving more than 300,000 families with highly reliable and high-performance energy storage products and end-to-end services. Guided by our mission to "NO ENERGY WASTE", we are committed to advancing the large-scale adoption of clean energy.

Main Business

Focus On High Quality Residential & Commercial ESS

Mission



To Strive Forward No Energy Waste

Vision



To be the World Widest Energy Storage Service Provider

Value



Action, Innovation, To be the Best, Win-win

Slogan



Trusty, Efficiency, Responsibility and Reliability






3GWH ANNUAL CAPACITY

New production line launched to ensure efficient global order fulfillment.

12-14 PPM

Four-times increase in productivity.
The output rate ramped up from 3-4 PPM to 12-14 PPM.

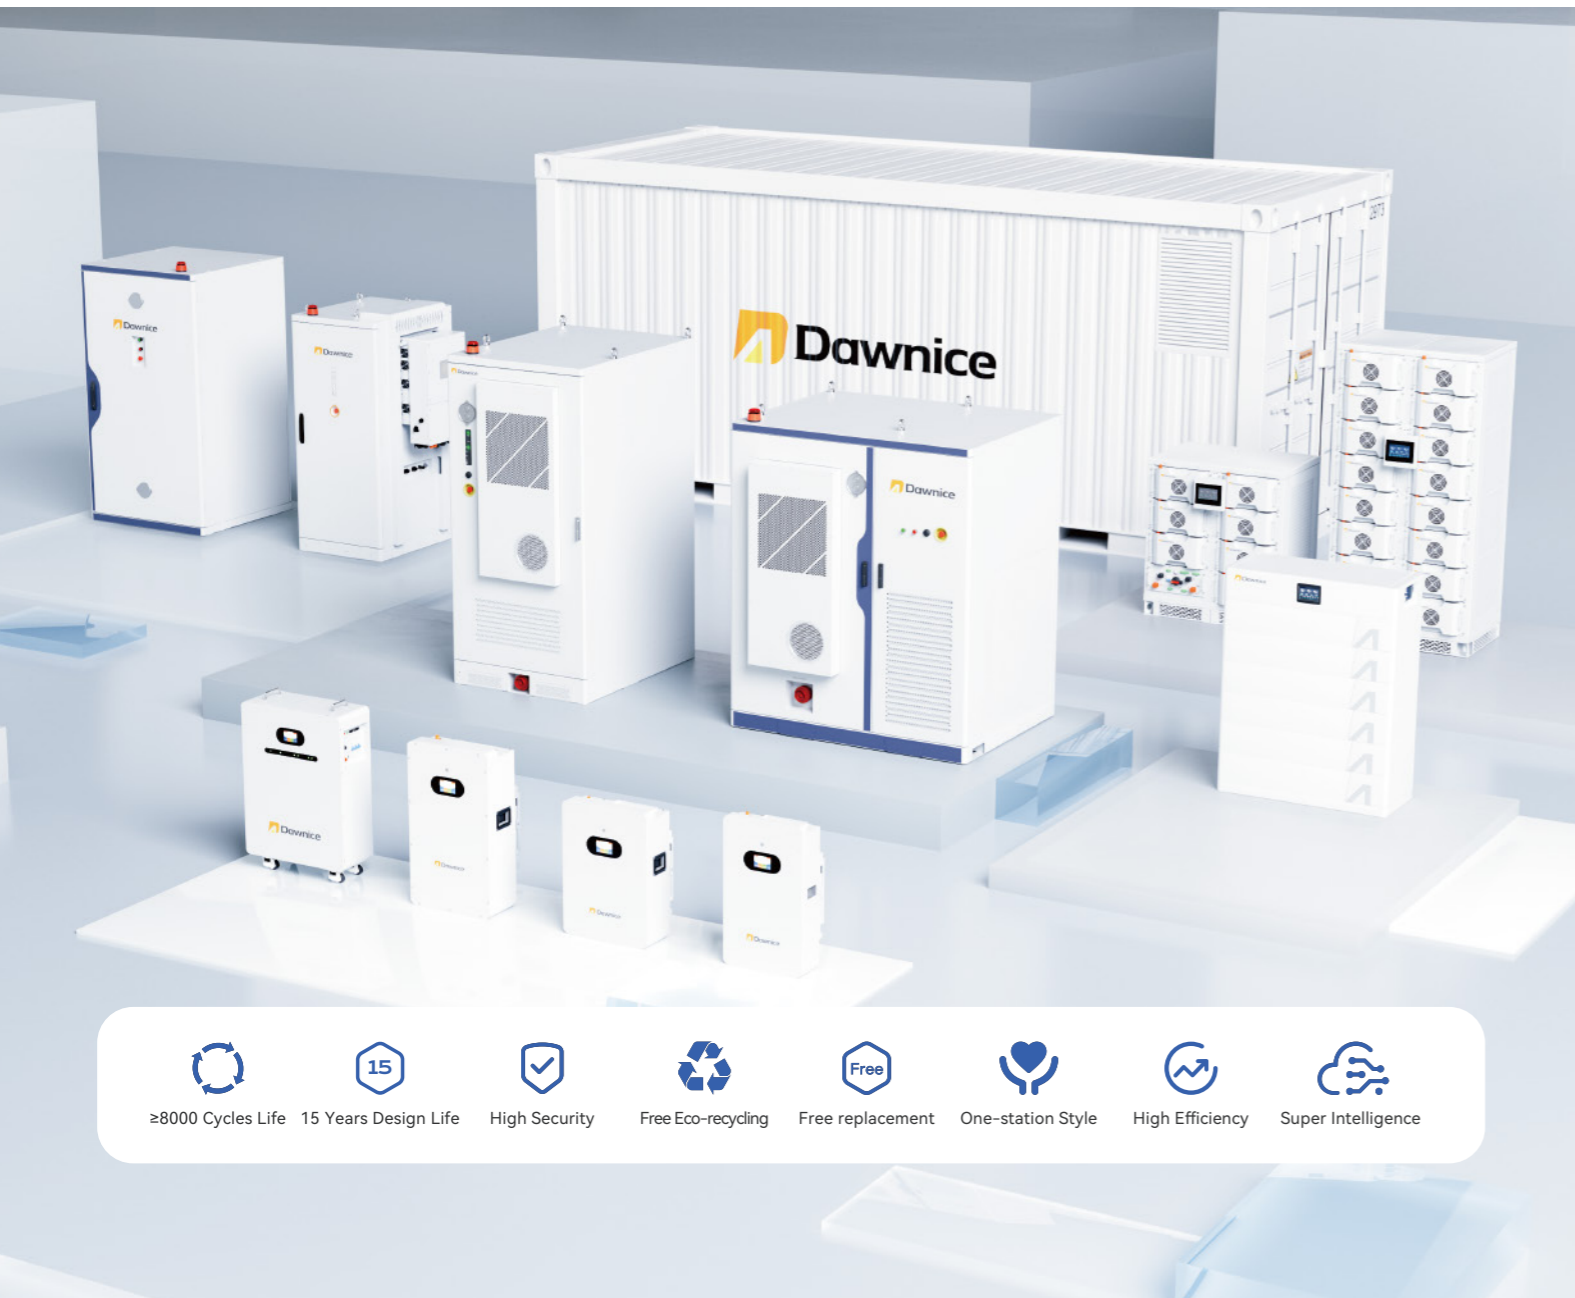

Robotics Technology

24/7 smart production.



Flexible Customization

Flexible production lines to meet different order requirements



INTELLIGENT MANUFACTURING

High-Degree Automation Matrix

The modular lines are operated by 4 robots, handling core processes.
Smart positioning technology throughout ensures consistent, high-standard operations.

Monitors the entire production process in real time

Automatically activates for any abnormalities or product deviations.
Provides 100% full-range quality inspection and testing coverage.

95%
Full-auto

100%
Quality Inspection

- ≥8000 Cycles Life
- 15 Years Design Life
- High Security
- Free Eco-recycling
- Free replacement
- One-station Style
- High Efficiency
- Super Intelligence

DAWNICE BUSINESS MAP

150+
Countries Covered

30+
Global Local Service Centers

300000+
Served Families



Global Local Service Centers

USA	Uzbekistan	Portugal	Mali	Puerto Rico	Estonia	Australia	Netherlands	Ireland	France
Iraq	Kenya	Lithuania	Switzerland	Zambia	Jamaica	Cuba	Jordan	Thailand	Saudi Arabia
Côte d'Ivoire	Peru	Ukraine	Austria	Slovakia	Afghanistan	Yemen	Nigeria	Eswatini	Czech

Our Partner



RESIDENTIAL ESS

PowerFly 6.0 Series

Wall-mounted / Ground-mounted


Mobile Control / IP54 / Optional Installation



HV Stackable Series

Six Ultra BS06-S


Mobile Control / Higher Density

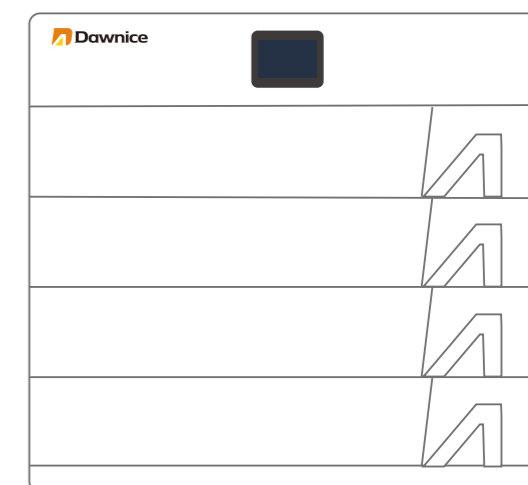

Energy storage battery PowerFly 6.0

Wall-mounted / Ground-mounted

5kWh/10kWh
16kWh/20kWh

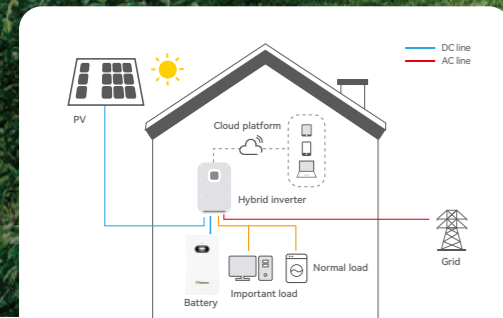

Features

Mobile Control

- Remote fault diagnosis, upgrade and maintenance
- OCV intelligent algorithm calibration ensures SOC accuracy

High Performance

- Big capacity with small volume for household
- Cycle life ≥ 8000 cycles

IP54 Dust and Water Protection

- IP54 protection rating, resist 200mm continuous heavy rain
- Dust-proof with desert-grade shield

Flexible Adaptability

- Quick and easy installation
- Modular design, expandable to 15 units in parallel

PERFORMANCE SPECIFICATIONS

Model	HZEB-LCT-5	HZEB-LCT-10	HZEB-LCT-16	HZEB-LCT-20
Battery Type	LiFePO ₄			
Nominal Voltage	51.2V	51.2V	51.2V	51.2V
Configuration	3.2V100Ah/1P16S	3.2V206Ah/1P16S	3.2V314Ah/1P16S	3.2V205Ah/2P16S
Capacity(Ah)	100Ah	206Ah	314Ah	410Ah
Nominal Energy(kWh)	5.12kWh	10.54kWh	16.07kWh	20.99kWh
Usable Energy(kWh@90%DOD) ^[1]	4.61kWh	9.49kWh	14.47kWh	18.89kWh
Max.Charge/Discharge Current(A) ^[2]	100A	100A	150A	200A
Voltage Range(V)	44.8~57.6V			
Scalability	Up to 15 units in parallel			
Communication Interface	CAN;RS232			
Cycle Life (@25°C,90%DOD) ^[3]	≥ 6000 Cycles	≥ 6000 Cycles	≥ 8000 Cycles	≥ 6000 Cycles
Warranty Period ^[4]	5+5 years			
Cumulative Discharge Energy	8.2MWh	16.9MWh	25.8MWh	33.7MWh

PERFORMANCE SPECIFICATIONS

Weight(kg)	59kg	83.5kg	127kg	180kg
Dimension(W*D*H)	400*160*700mm	460*245*640mm	460*245*800mm	650*265*850mm
Installation Method	Wall/Ground Mounted(20kWh battery ground-mounted only)			
IP Rating	IP54	IP54	IP54	IP21

SECURITY AND CERTIFICATION

Safety(Pack)	UN38.3,MSDS,IEC62619(CB),CE-EMC,IEC63056			UN38.3,MSDS
Safety(Cell)	UN38.3,MSDS,IEC62619,CE,UL1973,UL2054			
Protection	BMS	BMS	BMS	BMS and breaker

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range(°C)	Charge 0°C~55°C;Discharge -20°C~55°C			
Altitude(m)	≤ 2000 m			
Humidity	$\leq 90\%$ (Non-condensing)			

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90%DOD.System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.


[3] Battery cell life standard, using cells that meet the requirements of this standard.

[4] Conditions apply, refer to Dawnice Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications.All information is without guarantee despite of careful editing-liability excluded.

HV Stackable Energy Storage Battery

Six Ultra BS06-S

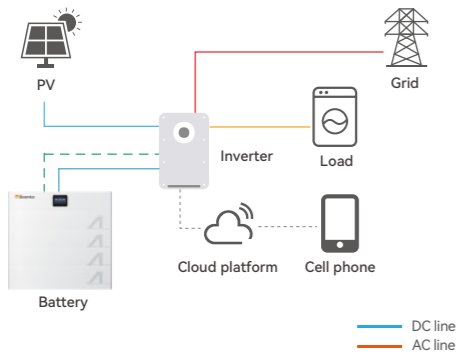

Features

- Higher Density, Fewer Packs**
 50% higher energy density
- Tip-resistant Fixation Point Design**
 Inter-module locking pins/fasteners with rear wall-mounted anchor points
- High Safety Performance**
 Integrated grounding points with enhanced protective safety

- Intelligent Design**
 Bluetooth/WiFi enabled with APP monitoring and OTA remote upgrade capabilities
- Snap-Fit Installation With Freeform Stacking**
 Consolidated from dual-stack to single-stack design, with scalable 6-stack capacity for complex scenarios
- Smart & High-Efficiency**
 Smart & high-efficiency system with self-learning SOC/SOH capability and autonomous fault diagnostics

PERFORMANCE SPECIFICATIONS

Model	BS06-15-S/2S	BS06-23-S/3S	BS06-30-S/4S	BS06-38-S/5S	BS06-46-S/6S
Battery Type	LiFePO ₄				
Nominal Voltage	153.6V	230.4V	307.2V	384.0V	460.8V
Configuration	3.2V100Ah/1P24S				
Capacity(Ah)	100Ah				
Nominal Energy(kWh)	15.36kWh	23.04kWh	30.72kWh	38.40kWh	46.08kWh
Usable Energy(kWh@90%DOD) ^[1]	13.82kWh	20.73kWh	27.64kWh	34.56kWh	41.47kWh
Max.Charge/Discharge Current(A) ^[2]	50A				
Voltage Range(V)	134.4~172.8V	201.6~259.2V	268.8~345.6V	336~432V	403.2~518.4V
Scalability	Up to 5 battery clusters in parallel				
Communication Interface	CAN;RS485				
Cycle Life ^[3]	≥6000 Cycles (25°C,0.5C/0.5C,90%DOD,70%EOL)				
Warranty Period ^[4]	5+5years				
Cumulative Discharge Energy	24.6MWh	37.0MWh	49.3MWh	61.6MWh	74.0MWh

MECHANICAL SPECIFICATIONS

Weight(kg)	184kg	259kg	334kg	409kg	484kg
Dimension (W*D*H)	870*450*530mm	870*450*690mm	870*450*850mm	870*450*1010mm	870*450*1170mm
Installation Method	Stackable				
IP Rating	IP65				
Anti-corrosion Grade	C4				

SECURITY AND CERTIFICATION

Safety(Pack)	UN38.3,MSDS
Safety(Cell)	UN38.3,MSDS,IEC62619,CE,UL1973,UL2054
Protection	BMS,Breaker

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range(°C)	Charge 0°C~55°C;Discharge -20°C~55°C
Altitude(m)	≤2000m
Humidity	≤90%(Non-condensing)

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.


[3] Battery cell life standard, using cells that meet the requirements of this standard.

[4] Conditions apply, refer to Dawnice Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications. All information is without guarantee despite of careful editing—liability excluded.




C&I ENERGY STORAGE SYSTEMS

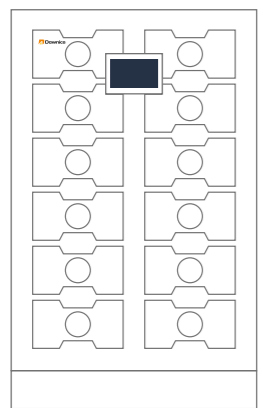

EnerFlex-2.0

112-225kWh HV Indoor Energy Storage Battery


Better heat dissipation
Easy maintenance, Dust-proof design

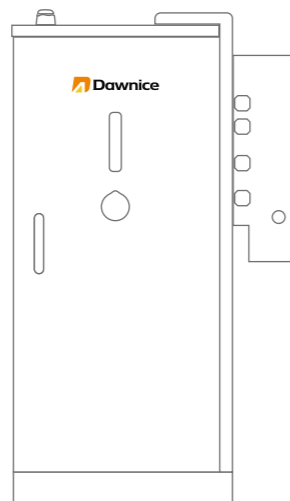

LOONG POWER 4.0

112kWh Outdoor Energy Storage System


High Performance, Safety and Security
Flexible Expansion, Integrated Cabinet Design

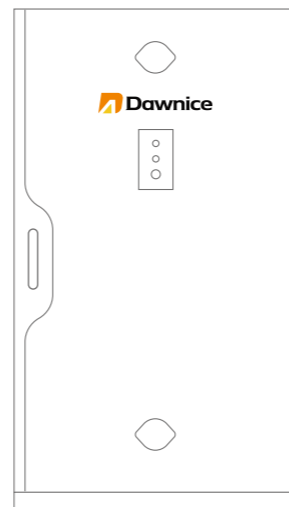

LOONG POWER 4.0

225kWh DC Outdoor Energy Storage Battery


High Performance, Safety and Security
Flexible Expansion, Integrated Cabinet Design

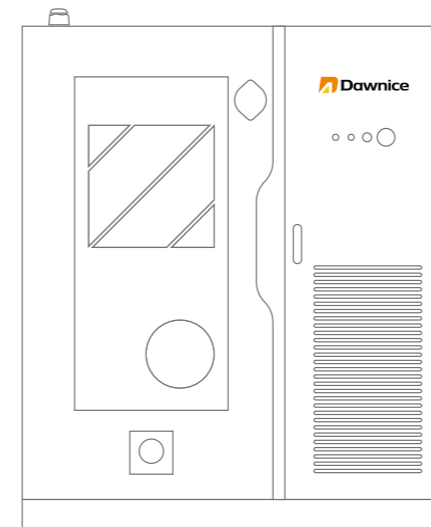

Nezha Series BS07-265-ES-G

Integrated PV-Storage -Genset Hybrid System

All-in-one Hybrid System
125kW/265kWh, Multi-Energy Integration

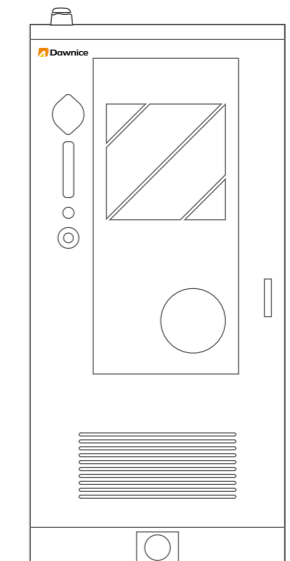

Nezha Series BS07-265-ES-X


Peak Shaving & Valley Filling All-in-one ESS

All-in-one On-grid System
125kW/265kWh, Up to 10 units in parallel

HV Indoor Energy Storage Battery EnerFlex-2.0

Dust Proof, No Cable Leakage
More Safer & Beautiful Appearance

314Ah
Upgraded

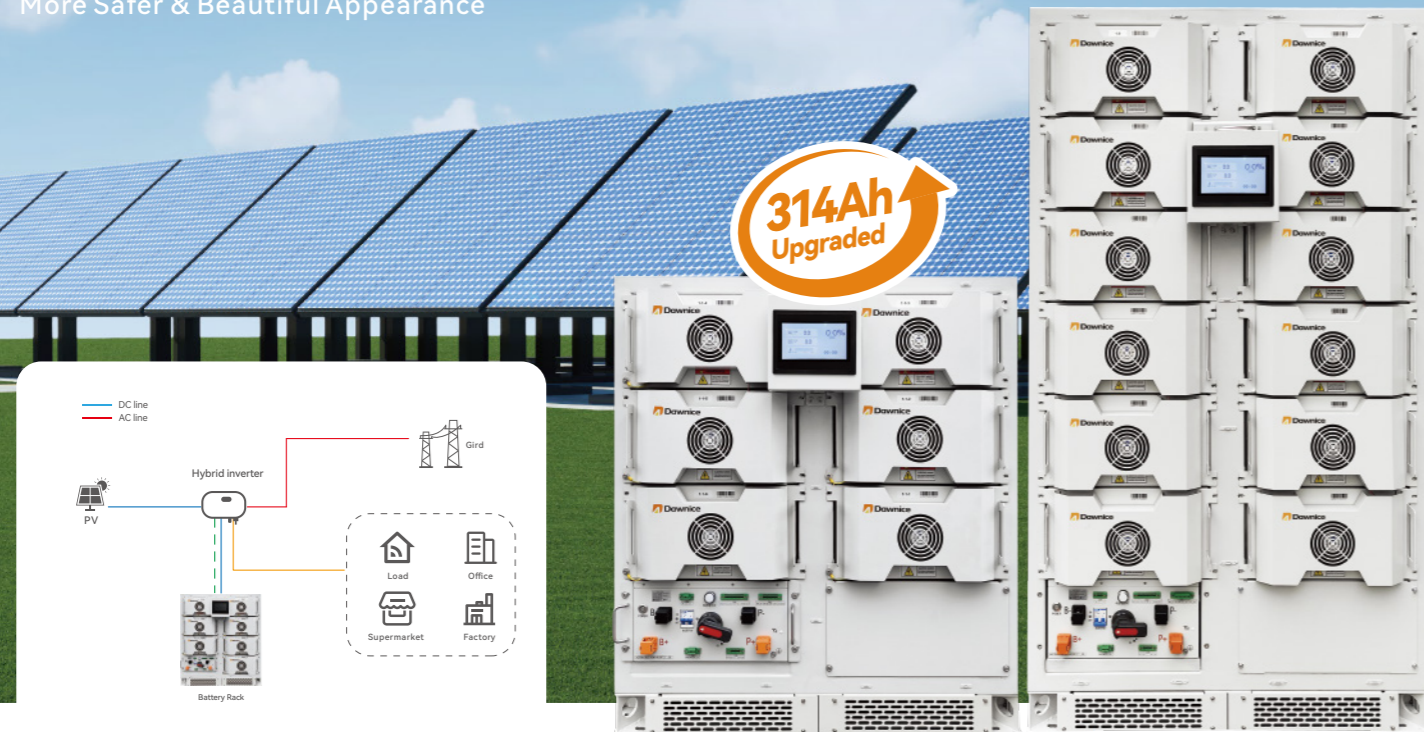

Features and Advantages

- Better Heat Dissipation**
- Temperature difference reduced by 35%
 - Temperature rise reduced by 32.12%

- Easy Installation**
- 225kWh battery installed in 5 minutes

- High Flexibility**
- BMS self-identification, up to 10 units in parallel

- Easy Maintenance**
- External communication acquisition module and remote screen, find the battery status in 5 minutes

SPECIFICATIONS

Model	BS09-112-R/7S	BS09-160-R/10S	BS09-192-R/12S	BS09-225-R/14S
Nominal Voltage(V)	358.4V	512V	614.4V	716.8V
Cell Mode/Configuration	3.2V314Ah/1P16S			
Capacity(Ah)Cell	314Ah			
Nominal Energy(kWh)	112.53kWh	160.76kWh	192.92kWh	225.07kWh
Usable Energy(kWh@90%DOD) ^[1]	101.28kWh	144.69kWh	173.62kWh	202.56kWh
Max.Charge/Discharge Current(A) ^[2]	157A			
Voltage Range(V)	313.6~403.2V	448~576V	537.6~691.2V	627.2~806.4V
Communication Interface	CAN; RS485			
Cycle Life ^[3]	≥8000 Cycles (25°C, 0.5C/0.5C, 90%DOD, 70%EOL)			
Warranty Period ^[4]	5+5 years			
Design Life	≥15Years(25°C)			
Display Mode	HMI Display (optional) Green light: system running / Red light: system alarm			
Cooling Method	Fan cooling			
Installation	Floor-mounted			
Cumulative Discharge Energy	180.7MWh	258.1MWh	309.8MWh	361.4MWh
MECHANICAL SPECIFICATIONS				
Weight(kg)	1015kg	1400kg	1630kg	1900kg
Dimension(W*D*H)	1100*792*1221mm	1100*792*1725mm	1100*792*1974mm	1100*792*2226mm
IP Rating	IP20			
SECURITY AND CERTIFICATIONS				
Safety(Pack)	UN38.3,MSDS			
Safety(Cell)	UN38.3,MSDS,IEC62619,CE,UL1973,UL2054			
Protection	Short-circuit protection,overcurrent protection,over-temperature protection			
ENVIRONMENTAL SPECIFICATIONS				
Operating Temperature(°C)	Charging: 0~55°C / Discharging: -20~55°C			
Working Altitude(m)	≤2000m			
Humidity	≤90%(non-condensing)			

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Battery cell life standard, using cells that meet the requirements of this standard.


[4] Conditions apply, refer to Dawnice Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications. All information is without guarantee despite of careful editing—liability excluded.

112kWh Outdoor LOONG POWER 4.0 Energy Storage System

Plug-and-play Inverter Compatibility
Triple Safety Monitoring

**314Ah
Upgraded**

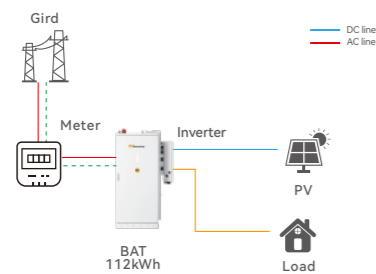

Features

Multi-Status Visual Indication

- Instant operational status recognition
- Hazardous condition alert within 1s

Triple Safety Monitoring

- Real-time detection: smoke , temperature
- Cabinet equipped with automatic fire alarm

Plug-and-play Inverter Compatibility

- ≥8,000-cycle durability certification
- Auto-recognition & plug-and-play

Equipped with a Display Screen

- Real-time system parameter visualization
- Integrated fault diagnosis system

MODEL	BS09-112-D-P
Battery Type	LiFePO ₄
Nominal Energy	16.076kWh
Nominal Capacity	314Ah
Nominal Voltage	51.2V
Number of Battery Packs	7
Charging Temperature Range	0°C~55°C
Discharging Temperature Range	-10°C~55°C
Module Parameters	
Nominal Energy	112.53kWh
System Usable Energy(kWh@90%DOD) ^[1]	101.28kWh
Nominal Voltage	358.4V
Operating Voltage Range	313.6~403.2V
Combination Method	1P112S
Charge and Discharge Current (A) ^[2]	157A
Discharge Depth	Max100%(Suggestion 80%)
IP Rating	IP54
Anti-corrosion Grade	C3(Optional C5)
Installation	Outdoor,floor-mounted
Cooling Method	Intelligent Air Cooling
Operating Temperature	-30~55°C (derating above 45°C)
Storage Temperature	0~35°C
Display Mode	Green light: system running / Red light: system alarm
Communication Interface	CAN; RS485
BMS Communication Method	CAN
Operating Humidity	≤90%(non-condensing)
Operating Altitude	≤2000m
Cycle Life ^[3]	≥8000 Cycles (25°C , 0.5C/0.5C, 90%DOD, 70%EOL)
Warranty ^[4]	5+5 years
Dimension (W*D*H)	915*1287*2085mm
Weight	1342kg
Cumulative Discharge Energy	180.7MWh
Certification	MSDS, UN38.3

[1] DC usable energy , test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD.System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Battery cell life standard, using cells that meet the requirements of this standard.

[4] Conditions apply, refer to Dawnice Warranty Agreement.


Text and images correspond to the current state of technology at the time of printing, subject to modifications.All information is without guarantee despite of careful editing-liability excluded.

225kWh DC Outdoor LOONG POWER 4.0

Automatic Fire Alarm
Automatic Fire Extinguishing System

Energy Storage Battery

**314Ah
Upgraded**

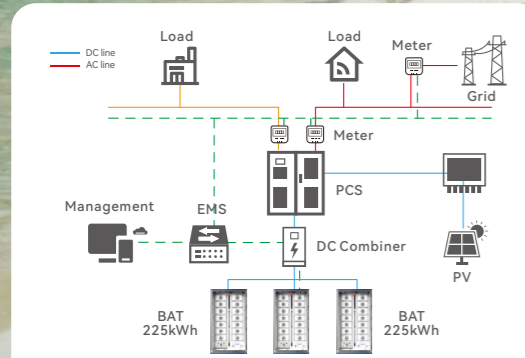

Features

High Efficiency Conversion
• Charge-discharge conversion and system efficiency $\geq 90\%$

Intelligent Control
• Intelligent climate control systems for a wide range of applications

Stable Operation
• With perfect communication, monitoring function, long time continuous and stable operation

Fire Fighting System
• Cabinet equipped with automatic fire alarm and automatic fire extinguishing system

Model	BS09-225-D
Battery Pack(1P16S)	
Battery Type	LiFePO ₄
Rated Voltage	51.2V
Nominal Capacity	314Ah
Pack Energy	16.076kWh
Weight	122kg
Battery System(1P224S)	
Rated Voltage	716.8V
Nominal Energy(kWh)	225.07kWh
Usable Energy(kWh@90%DOD)[1]	202.56kWh
Max.Charge/Discharge Current(A)[2]	157A
Voltage Range	627.2-806.4V
Cycle Life[3]	≥ 8000 Cycles(25°C,0.5C/0.5C,90%DOD,70%EOL)
Warranty Period[4]	5+5 years
Cumulative Discharge Energy	361.4MWh
Configuration	1P224S
Scalability	Up to 10 units in parallel
Relative Humidity	90%
Cooling Method	Intelligent Air Cooling
Noise	75dB(<1m distance)
Altitude	≤ 2000 m
Operating Temperature Range(°C)	-30°C~55°C (> 45°C derating)
Display Mode	Green light: system running / Red light: system alarm
Communication Interface	CAN;RS485
BMS Communication Method	CAN
IP Rating	IP54
Anti-corrosion Grade	C3(Optional C5)
Dimension (W*D*H)	1250*1413*2385mm
Weight	2534kg
Certifications	UN38.3,MSDS,IEC62619(CB),CE-EMC

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Battery cell life standard, using cells that meet the requirements of this standard.


[4] Conditions apply, refer to Dawnice Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications. All information is without guarantee despite of careful editing—liability excluded.

Dawnice Integrated PV-Storage -Genset Hybrid System

Nezha Series BS07-265-ES-G

125kW/265kWh

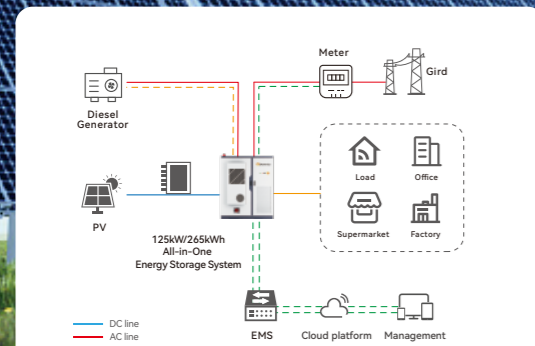

Features

Advanced Battery Safety System

- Triple-layer protection architecture
- Real-time fault diagnosis
- Multi-level thermal runaway prevention

Integrated Fire Protection

- Multi-sensor early warning
- Automatic aerosol suppression
- <500ms response time

Flexible Load Management

- 3P4W unbalanced load support
- Dynamic phase compensation
- 0.9 leading/lagging PF adjustment

Intelligent Power Management

- High-precision SOC/SOH monitoring
- Adaptive charge/discharge control
- ≥99.9% system availability

Multi-Energy Integration

- Seamless PV/diesel/grid coupling
- Automatic source transfer (≤20ms)
- Hybrid power scheduling

Multi-Mode Operation


- Grid-connected/Islanding/Hybrid modes
- Black start capability
- Microgrid interoperability

Model	BS07-265-ES-G
Battery Parameters	
Battery Type	LiFePO ₄
Configuration	1P264S
Rated Battery Voltage	DC 844.8V
Nominal Capacity	314Ah
Battery Voltage Range	739.2~950.4V
Nominal Energy	265.267kWh
Usable Energy(kWh@90%DOD)	238.74kWh
Cycle Life	≥8000 Cycles(@25°C,0.5C,90%DOD,70%EOL)
Warranty Period	5+5 years
Cumulative Discharge Energy	426.0MWh
PV input Parameters	
Input Power	120kW
PV Open-circuit Voltage	DC 200~900V
MPPT Voltage Range	DC 200~700V
Start-up Voltage	250V
No. of MPPT Trackers	1
Max. PV Current	200A
Short-circuit Current	60A+60A+60A+60A
AC (On Grid)	
Rated Power	125kW
Output Voltage	AC 230/400V
Grid Frequency	50/60Hz
Grid Connection Form	3W+N+PE
Power Factor	0.99
Power Factor Range	-1(leading)~1(lagging)
THDi	<2%(rated power)
AC (off-grid)	
Rated Power	125kW
Output Voltage	AC 230/400V
Grid Frequency	50/60Hz
AC Voltage harmonic	<3%(Linear load)
Isolation Transformer Parameters	
Voltage	AC 400/400V
Capacity	150kVA
Max. Efficiency	≥97%
Short-Circuit Impedance	4%
Basic Parameters	
Dimension (W*D*H)	1758*1476*2135mm
Weight	3350kg
Operating Temperature Range(°C)	-30°C~55°C(>45°C derating)
Relative Humidity	5%~90%(non-condensing)
IP Rating	IP54
Anti-corrosion Grade	C4(Optional C5)
Noise	75dB(<1m distance)
Altitude	≤2000m
Cooling Method	Intelligent Air Cooling (Battery compartment air conditioning,electrical compartment fan)
Certifications	UN38.3,MSDS,IEC62619(CB),IEC63056(CB),IEC62040-1(CB),CE-EMC,IEC62477-1,IEC60529

Peak Shaving & Valley Filling All-in-one ESS

Nezha Series BS07-265-ES-X

125kW/265kWh

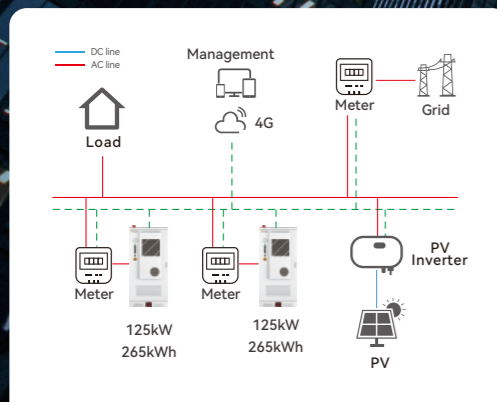

Model	BS07-265-ES-X
Battery Parameters	
Battery Type	LiFePO ₄
Cell Mode/Configuration	3.2V314Ah/1P264S
Rated Battery Voltage	DC 844.8V
Battery Voltage Range	DC 739.2~950.4V
Nominal Energy	265.26kWh
Usable Energy(kWh@90%DOD) ^[1]	238.74kWh
Max Charge/Discharge Current(A) ^[2]	157A
Cycle Life ^[3]	≥8000 Cycles(@25°C,0.5C,90%DOD,70%EOL)
Warranty Period ^[4]	5+5 years
Cumulative Discharge Energy	426.0MWh
AC (On Grid)	
Rated Voltage	400V
Rated Voltage Range	±15%
Grid Frequency	50/60Hz
Grid Connection Form	3W+N+PE
Rated Power	125kW
Max. power	138kW
Max. current ^[4]	200A
Power Factor	0.99/-1~1
THDi	<2%(rated power)
DC Component	<0.5%
Overload Capacity	110%
Max. efficiency	98.5%
Basic Parameters	
Dimension (W*D*H)	1095*1520*2395mm
Weight	2680kg
Operating Temperature Range(°C)	-30°C~55°C(> 45°C derating)
Relative Humidity	5%~90%(non-condensing)
IP Rating	IP54
Anti-corrosion Grade	C4(Optional C5)
Noise	75dB(<1m distance)
Altitude	≤2000m
Cooling Method	Intelligent Air Cooling
Fire Protection	Aerosol and water fire protection
Communication Interface	CAN;RS485
Certifications	UN38.3,MSDS,IEC62619(CB),IEC63056(CB),IEC62040-1(CB),CE-EMC,IEC62477-1,IEC60529

Features



Improve Energy Density

314Ah high-capacity cells with industry-leading energy density CTP (cell-to-pack) technology improve energy density



Multi-Layer Safety Protection

Dual fire suppression: cluster-level aerosol + cabin-level water mist enhanced cell monitoring for precise cutoff



Foolproof & Efficient Maintenance

Error-proof busbar design cuts installation time
Advanced balancing algorithm extends battery lifespan



Flexible & Space-Saving Deployment

Front-in/rear-out thermal design enables zero-gap side-by-side & back-to-back installation optimized airflow maintains stability in high-density layouts



Intelligent Temperature Control

PCS waste heat recovery reduces auxiliary cooling energy



Smart Monitoring System

Real-time voltage/temperature tracking for proactive safety management

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Battery cell life standard, using cells that meet the requirements of this standard.

[4] Conditions apply, refer to Dawnice Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications. All information is without guarantee despite of careful editing-liability excluded.

Energy Storage Container

1MW / 2MWh

500kW / 1MWh



Features



Multi-Mode Flexibility

- Multiple working modes can be flexibly set.



Intelligent Thermal Control

- Support battery management system and comprehensive thermal management.



Thermal Isolation Safety

- The electrical compartment and battery compartment are separated to prevent runaway spread of heat.



Real-Time Status Monitoring

- Support real-time online monitoring of system status



Universal Power Access

- Support simultaneous access to load, battery, grid, DG



Rapid Deployment Design

- Integrated design, easy to transport and install, flexible deployment

PERFORMANCE SPECIFICATIONS

Model	ESS1000-2089	ESS500-1045
Rated power (kw)	1000	500
Rated voltage (V)	400	400
Rated current (A)	1570A	785A
Voltage range (V)	320V-460V	320V-460V
Rated frequency	50/60Hz	50/60Hz
Frequency Range	45-55/55-65Hz	45-55/55-65Hz
THDi(on-grid)	<3%	<3%
THDu (off-grid)	<1% linear; < 5% non-linear	<1% linear; < 5% non-linear
Power factor	1 (0.8 leading ~ 0.8 lagging can be set)	1 (0.8 leading ~ 0.8 lagging can be set)
Overload capacity	110% Long term	110% Long term
AC output	3W+N+PE	3W+N+PE
Isolation transformer	315/400	315/400
On-grid off-grid switching	Support	Support
Battery data		
Cell type	3.2V/314Ah	3.2V/314Ah
Nominal voltage(V)	665.6V/10P208S	665.6V/5P208S
Nominal energy (Mwh)	2.089	1.045
Working voltage range (V)	582.4-748.8V	582.4-748.8V
Max. charge and discharge rate	0.5c@25°C	0.5c@25°C
Number of Battery Cycles	≥8000	≥8000
System data		
Dimensions W*D*H (mm)	12,192x2,438x2,896	20Ft
Net weight (kg)	38,000	21,000
Operating temperature (°C)	0~+45	0~+45
Relative humidity	0~95%(non-condensing)	0~95%(non-condensing)
ingress protection	IP54	IP54
Noise emission (dB)	<75dB	<75dB
Operating altitude	3,000m	3,000m
Colling	Intelligent air cooling	Intelligent air cooling
fire extinguishing system	FM200/NOVEC1230	FM200/NOVEC1230
Display	Touch LCD display+cloud platform	Touch LCD display+cloud platform
EMS communication	RS485, TCP/IP	RS485, TCP/IP
Corrosion protection grade	C5	C5



5kWh-10MWh
Project capacity

ALL-SCENARIO ESS SOLUTIONS

PV-Storage System, PV-Storage-Diesel Hybrid System, Smart Microgrid, Peak Shaving & Valley Filling etc.

LEADING C&I ESS PROVIDER

14 years specializing in lithium batteries, with full supply-chain control from raw materials ,cells, battery assembly , applications to ensure top-tier reliability.

China's first standardized commercial & industrial energy storage solution.

4+
First Project Running Year

1000+
C&I In Operation




Office Buildings



Hospitals



Shopping Malls

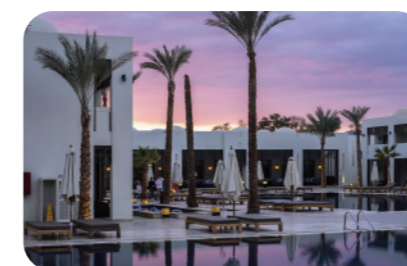

Off-grid Resort



Data Center



Heavy Industry



Farms



Charging Station




Mine And Field Operation Base



Cold Storage



Greenhouse

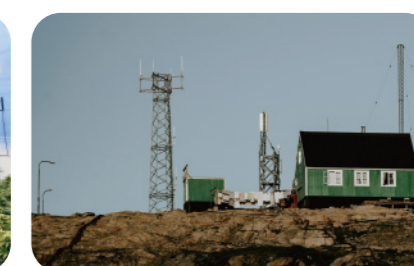

5G Communication Base Station

RESIDENTIAL CASES

📍 Middle East



Capacity:32kWh

📍 Poland



Capacity: 40kWh

📍 Cuba



Capacity:64kWh

📍 Mali



Capacity:48kWh

📍 Poland



Capacity: 40kWh

📍 Liberia



Capacity:25kWh

📍 Malaysia



Capacity:48kWh

📍 Vietnam



Capacity:32kWh

📍 Middle East



Capacity:20kWh

📍 USA



Capacity:100kWh

📍 Puerto Rico




Capacity:10kW/20kWh

📍 Thailand



Capacity:32kWh

📍 U.K.

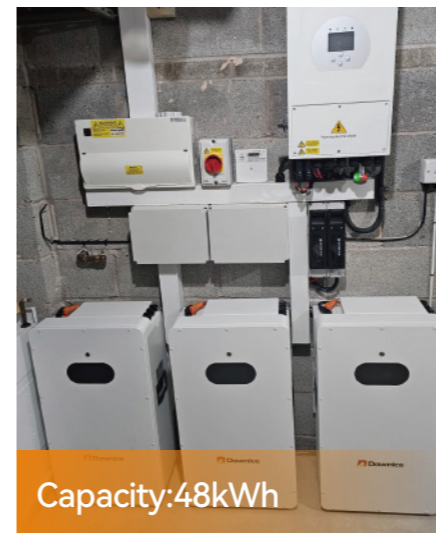

Capacity:48kWh

📍 Mali



Capacity: 160kWh

C&I PROJECT CASES

📍 Netherlands



Capacity:1MW/2MWh

📍 Vietnam



Capacity:200kWh

📍 Ireland



Capacity:688kWh

📍 Germany



Capacity:40kW/100kWh

📍 Netherlands



Capacity:40kW/100kWh

📍 Netherlands



Capacity:1MW / 2MWh

📍 Zambia



Capacity:1.5MWh

📍 Kenya



Capacity:250kW/240kWh

📍 Vietnam




Capacity:265kWh

📍 Uzbekistan



Capacity:40kW/100kWh

📍 Estonia

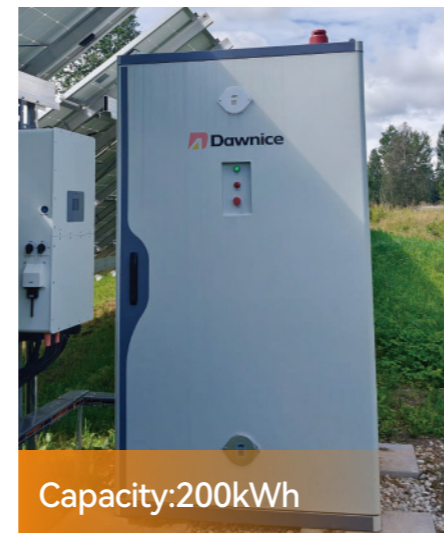

Capacity:200kWh

📍 Middle East



Capacity:200kWh

📍 Austria



Capacity:1MWh

GLOBALLY CERTIFIED

Certified to IEC 62619, IEC 62477, IEC 61000, IEC 63056, ISO9001, MSDS, UN38.3 etc.



Invention Patent

Invention patent ZL 2023 1 1056878.2

Design patent ZL 2025 3 0069876.0

Utility model patent ZL 2024 2 2985320.9

	← Jasmine Pre-sale Manager		← Nikki Pre-sale Support		← Emma Pre-sale Support
↘ Terence System Engineer		↘ Willow System Engineer		↘ Jayden After-sale Manager	
	← Eunice After-sale		← Reway Quality Engineer		← Annice Technical Support Engineer
	Dawnice Service Team	↘ Ouyang Pack Engineer		↘ Feirong Pack Engineer	

DAWNICE SERVICE CENTER

Engineer Team
24-persons Engineer Team

After-sales Team
24 Hours / 7 Days Online Service

Product Training
Professional One-to-one Products Training

Installation
Worldwide Dawnice Installers